
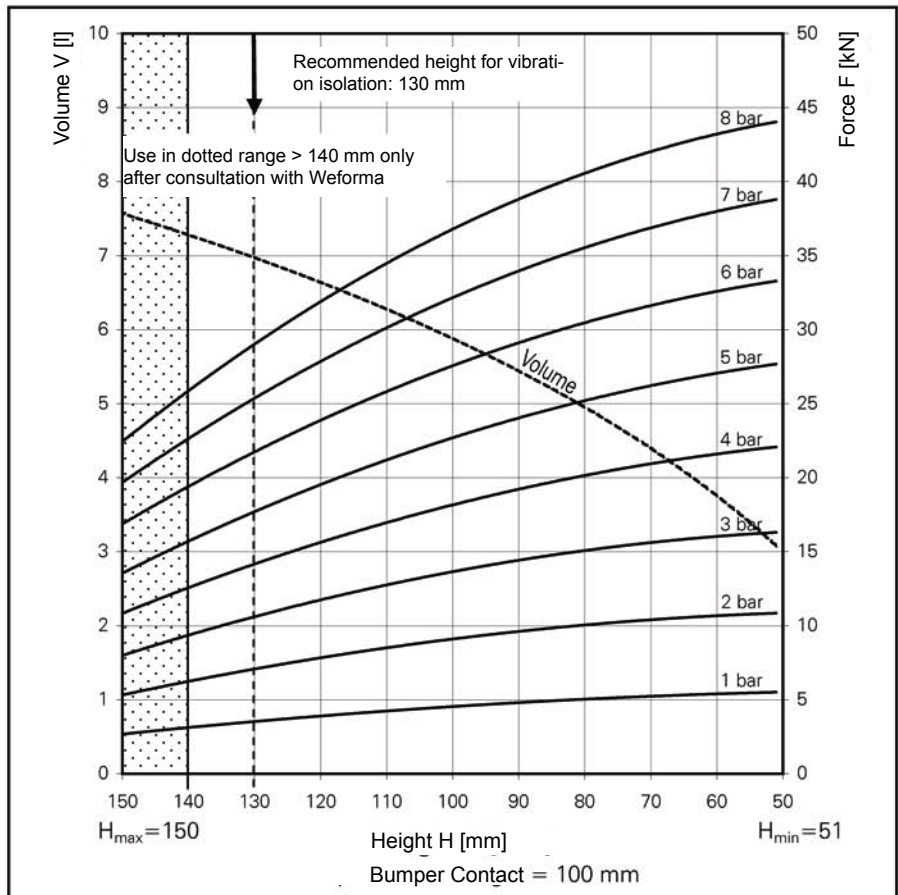


## WBE 500

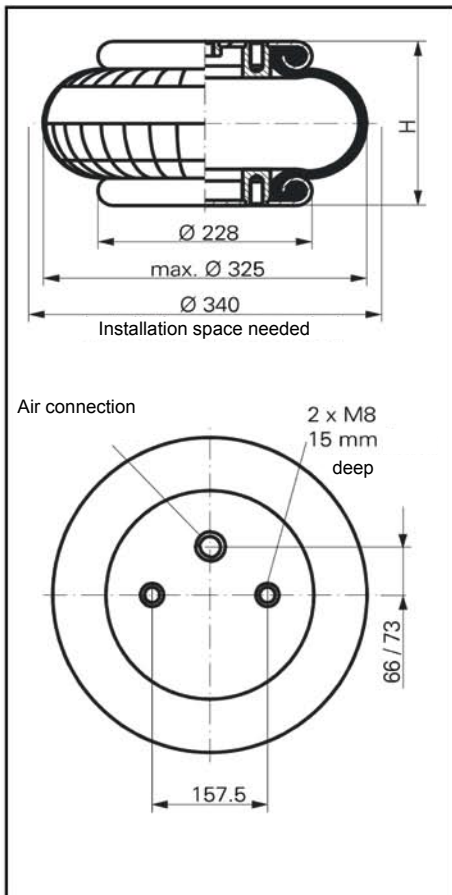

Force-height diagramm

### Air inlet

WBE 500-E1 G1  
WBE 500-E2 G1/4

### Technical data

Min. pressure	0 bar
Return force to min. height	≤ 300 N
Overall weight with clamped plates	4.1 kg

### Vibration isolation - dynamic characteristic values

Design height recommended 130mm, minimum 100mm

Pressure p [bar]	3	4	5	6	7	8	Vol. V [l]
Force (Load) [kN]	10.7	14.2	17.8	21.8	25.4	29.0	7.0
Spring rate c [N/cm]	2645	3290	3935	4580	5225	5870	
Natural frequenz f <sub>0</sub> [Hz]	2.5	2.4	2.4	2.3	2.3	2.3	

### Pneumatic application - static characteristic values

Force F [kN]

Pressure p [bar]	3	4	5	6	7	8	Vol.[l]
Height H [mm]	130	14.2	17.8	21.8	25.4	29.0	7.0
	120	11.9	15.7	19.6	23.8	27.8	6.7
	110	12.7	16.9	21.1	25.8	30.1	6.3
	100	13.6	18.1	22.7	27.6	32.1	5.8
	90	14.4	19.2	24.0	29.1	34.0	5.3
	80	15.0	20.2	25.2	30.5	35.5	4.8
	70	15.5	20.9	26.2	31.6	36.9	4.3
	60	16.0	21.6	27.1	32.6	38.0	3.8



Service instructions

M8 = 25 Nm  
G 1 = 50 Nm  
G 1/4 = 25 Nm