


WM-VD 32



Precise adjustment in Push- and Pull direction
Continuous adjustment over the entire stroke

Deceleration	Double-acting
Surface protection	Housing: anodised aluminium
Extended life time	Piston rod: hard-chrome plated
Temperature	-20°C - +80°C (-4°F - +176°F)
RoHS compliant	Directive 2002/95/E

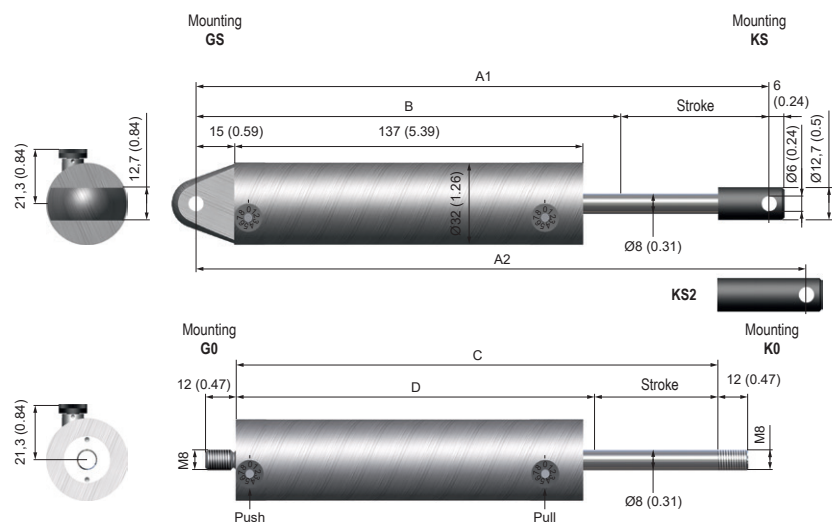

Accessories Pages 115

PERFORMANCE

	Stroke	Pull	Push	Pull - Push	Speed rates	A1	A2	B	C	D	Weight
	mm (inch)	N max. (lbs max.)	N max. (lbs max.)	N min. (lbs min.)	m/min (ft./min)	mm (inch)	mm (inch)	mm (inch)	mm (inch)	mm (inch)	g (lbs)
WM-VD 32 - 050	50 (1.97)	2000 (449.62)	2000 (449.62)	40 (8.99)	0,015 - 40 (0.05 - 132)	225 (8.86)	250 (9.84)	175 (6.89)	190 (7.48)	140 (5.51)	370 (0.82)
WM-VD 32 - 075	75 (2.95)	2000 (449.62)	2000 (449.62)	40 (8.99)	0,015 - 40 (0.05 - 132)	275 (10.83)	300 (11.81)	200 (7.87)	235 (9.25)	165 (6.5)	420 (0.93)
WM-VD 32 - 100	100 (3.94)	2000 (449.62)	1700 (382.18)	40 (8.99)	0,015 - 40 (0.05 - 132)	325 (12.8)	350 (13.78)	225 (8.86)	290 (11.42)	190 (7.48)	470 (1.04)
WM-VD 32 - 150	150 (5.91)	2000 (449.62)	1400 (314.73)	40 (8.99)	0,015 - 40 (0.05 - 132)	425 (16.73)	450 (17.72)	275 (10.83)	390 (15.35)	240 (9.45)	570 (1.26)
WM-VD 32 - 200	200 (7.87)	2000 (449.62)	1000 (224.81)	40 (8.99)	0,015 - 40 (0.05 - 132)	525 (20.67)	550 (21.65)	325 (12.8)	490 (19.29)	290 (11.42)	670 (1.48)
WM-VD 32 - 250	250 (9.84)	2000 (449.62)	600 (134.89)	40 (8.99)	0,015 - 40 (0.05 - 132)	625 (24.61)	650 (25.59)	375 (14.76)	590 (23.23)	340 (13.39)	770 (1.7)

Ordering Information

WM-VD 32-100-K2G4-C

WM Weforma	K2 Piston rod - Angle joint
VD Speed control, double-acting	G4 Housing - Spherical end bearing
32 Size	C Type of deceleration: A=push, B=pull, C=push and pull
100 Stroke	