



Proximity switch

N6

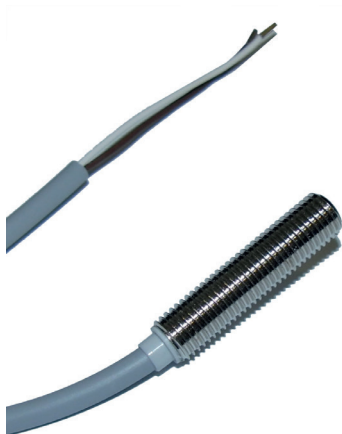

ONLINE
Calculation and
2D / 3D CAD Download

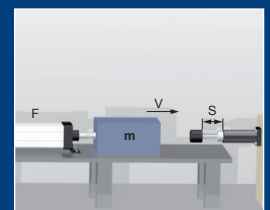


TECHNICAL DATA

Reed-magnetic switch

Order-No. **N6**

| | |
|--|---|
| output | NO |
| switching capacity | max. 10W/VA |
| switching voltage | max. 30 VAC / 100 VDC |
| switching current | max. 500mA |
| switch on time | 0,4 ms |
| switch off time | 0,05 ms |
| switching frequency | max. 100Hz |
| lifetime at nominal load | 10 ⁵ to 10 ⁶ operations |
| operating temperature range | -25°C - +70°C |
| dielectric test voltage ac (rms.) U _i | 500 V |
| degree of protection acc, to DIN 60 529 | IP67 |
| on/off indication | - - - |
| connection | 5m PVC-cable 2x 0,34 mm ² |
| housing material | brass, nickel plated |
| fixing torque | max. 3,0 Nm |

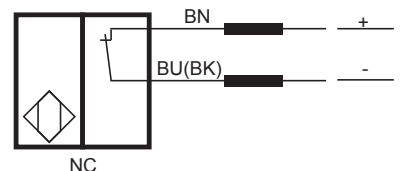

DIMENSIONS

